



# TEXTURED CARBON FIBER



## FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Lycra, Wool, Linen - **Excluding Nylon**

## SIZING

Available Widths (in.): 12" and 20"  
Available Lengths (ft.): (12") 30', 60', 90', & 162' only

## THICKNESS


Matte, Metallic, and Glossy:  
4 mils/100 microns  
Metal Flakes: 5 mils/125 microns

Has the look and feel of carbon fiber. Can be used with **PLUS** & other lines to add value and pop to your designs. Gravure printed patterns that add dimension to your designs. Pressure-sensitive carrier enables easy weeding and repositioning.

**SPECIAL PRECAUTIONS:** You cannot layer anything on top of or beneath this material.

**COLOR VARIATION:** During the manufacturing process, sometimes there is a slight color variation between rolls.

**TECH TIPS:** Pressing onto thin fabric, you need to put a Teflon™ sheet inside the garment to ensure the adhesive doesn't transfer to the other side.

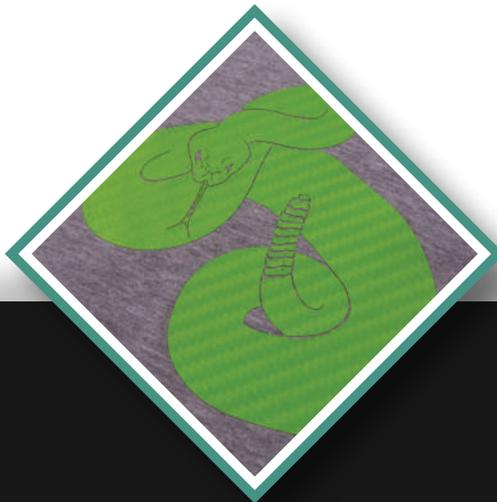

▪ **CUTTING**  
60° Blade recommended



▪ **MIRRORING**  
Cut this material in mirror image.



▪ **PRESSING**  
Medium, even pressure



▪ **TEMPERATURE**  
325°F



▪ **TIMING**  
15 seconds



▪ **PEELING**  
Peel cold



▪ **WASHING**  
Cold water, gentle cycle  
Low heat.



▪ **LASER COMPATIBLE**  
This product contains no PVC and will not emit hazardous fumes.

**"It's best to test!"** Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing material. Dye migration may occur with low energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under manufacturer's control and is not responsible for issues due to third-party material qualities. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.