

ThermoFlex® PLUS



FABRICS

Cotton, Uncoated Polyester, Cotton/Polyester Blends, Polyester/Acrylic Blends, Linen, Wool - **Excluding Nylon**


SIZING

Available Widths (in.): $12^{\prime\prime}$, $15^{\prime\prime}$, $20^{\prime\prime}$, and $30^{\prime\prime}$ Available Lengths (ff.): 15^{\prime} , 30^{\prime} , 45^{\prime} , 60^{\prime} , 90^{\prime} , and $150^{\prime*}$ rolls (*not available in some colors) Sheets: $12^{\prime\prime} \times 15^{\prime\prime}$ Packs: 10 (one color)

THICKNESS

Matte, Metallic, and Glossy: 4 mils/100 microns Metal Flake: 5 mils/125 microns

Widest color selection in the industry. Beautiful screen-print like finish and soft touch. Most colors can be layered for an even more colorful visual experience. Pressure-sensitive carrier makes for an easy weeding experience. When applied correctly, **PLUS** will outlast the life of the garment.

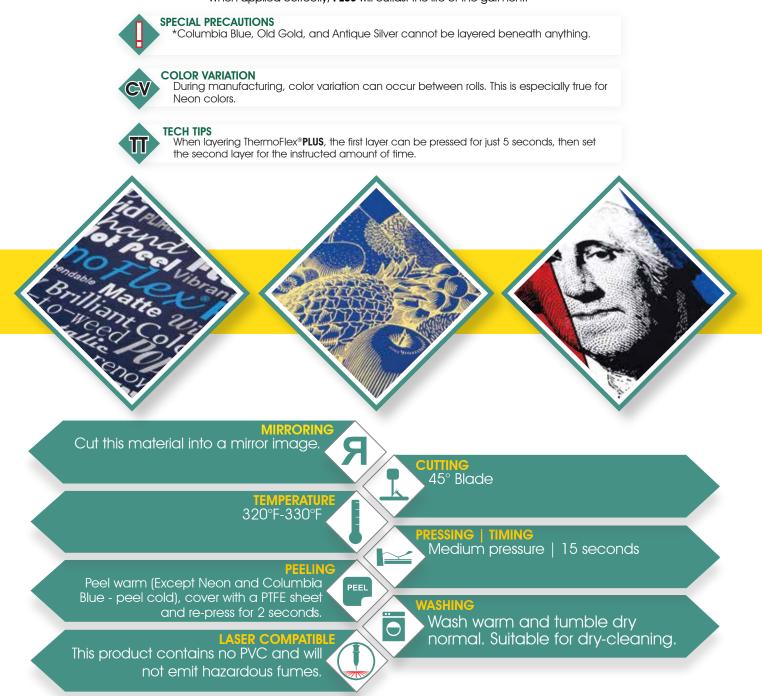

"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing the material. Dye migration may occur with low-energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability whatsoever in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under the manufacturer's control and is not responsible for issues due to third-party material qualities. The Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by the manufacturer. ©2023 Specialty Materials & Digital Decoration, LLC. | A POLI-TAPE Company | All rights reserved | Tulsa, OK 74146 | 877-437-8556 Tech Help: tech@specialtymaterials.com | Sample Request: samples@specialtymaterials.com



ThermoFlex® PLUS

CPS





ThermoFlex® PLUS

COMPLIANT



SM

ThermoFlex® PLUS

COMPLICATION





@SpecialtyMaterials

ThermoFlex® PLUS



@SpecialtyMaterials

