

ThermoFlex® **TURBO** Brights



FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Spandex, Wool, Linen, and Nylon

SIZING

Available Widths (in.): 15" and 20" Available Lengths (ff.): 15', 30', 45', 60', 90', and 150' rolls



4 mils/100 microns

ThermoFlex®TURBO Brights presses quickly at a low temperature, which eliminates press marks. Durable, weeds easily, and has a soft hand and strong grip. Does not encourage dye-migration since it has a low heat and quick press time. Pressure-sensitive carrier enables easy weeding and repositioning.




SPECIAL PRECAUTIONS

*This product cannot be layered beneath anything.



COLOR VARIATION During manufacturing, color variation can occur between rolls. This is especially true for Neon colors.

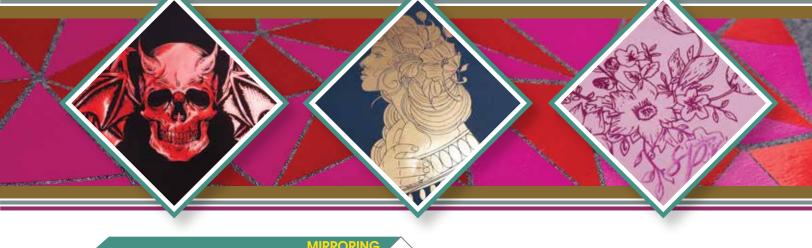

MIRRORING

Cut this material into a mirror image

TEMPERATUR 270°F | Nylon: 300°F

CUTTI 45° Blade

essing | timing

Medium pressure | 5 seconds Nylon: Low pressure | Pre-press for 5 seconds, then press for 5 seconds.

ASHING

Turn inside-out, wash warm, regular cycle, mild detergent. Do not use bleach. Tumble dry normal. Do not iron directly onto this material. Suitable for dry-cleaning.

PEELING Peel warm | Nylon: Peel warm, cover with a silicone sheet, and repress for 10 seconds.

LASER COMPATIBLE This product contains no PVC and will not emit hazardous fumes.

"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing the material. Dye migration may occur with low-energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability whatsoever in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under the manufacturer's control and is not responsible for issues due to third-party material qualities. The Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by the manufacturer. ©2023 Specialty Materials & Digital Decoration, LLC. | A POLI-TAPE Company | All rights reserved | Tulsa, OK 74146 | 877-437-8556 Tech Help: tech@specialtymaterials.com | Sample Request: samples@specialtymaterials.com

PEEL

 \bigcirc



















SpecialtyMaterials

@Specialtymateric

@Spoltymtrk